

## Level Control Valve

## Modulating, Constant Level (Model 131-010)

## **Special Features**


- Completely automatic operation without Electric Power Source.
- · Easy Installation and Maintenance.
- Buoyancy pilot valve using excellent durability ball valve's opening and closing.

Model 131-010 consists of Robocon Valve (Balem 130) and Buoyancy pilot valve. It controls outflow in a water supply tank and/or in a reservoir to maintain constant water level.

Double chamber structure minimizes the effect of the valve action due to turbulence in the valve and easy to install and maintain.

Description	Item
BALEM 130 (Robocon Valve)	1
Float Control Pilot Valve	1
Cock Valve	2
Needle & Strainer	1

Size	Pattern	Operating Pressure	Media	End Connection
50A~300A	Up-right Globe Type	10, 16, 20, 25kgf/cm <sup>2</sup>	Water, Oil Temperature : 0℃ ~ 80℃	According to Customer Request
	Angle Type			
50A~1000A	Y-type Globe			

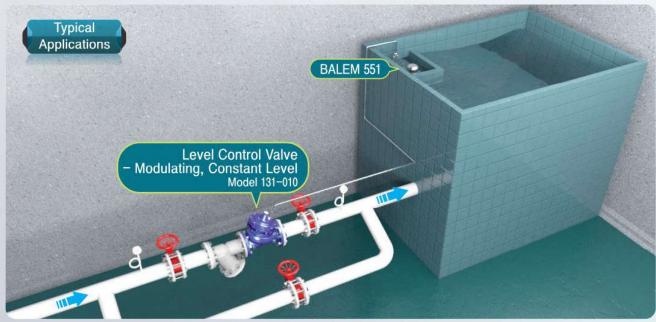

Product installation, please refer to the installation of the 25page recommendations.

28